

24-channel 4K Network Video Recorder

1U 24-port PoE 4K SATA Network Video Recorder





System Overview

Dahua's Pro Series network video recorders offer excellent performance and high recording quality for IP video surveillance applications. For applications where details are critical for identification, this professional NVR provides a powerful processor with up to 4K resolution. Additionally, the NVR features a mouse shortcut operation menu, remote management and control, center storage, edge storage, and back up storage.

Designed as a cost-effective and easy to install recorder, this NVR is an ideal addition to any security system that monitors public spaces, water conservancy, transportation, city centers, schools, and financial institutions.

The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and it is compatible with ONVIF 2.4, enabling interoperability when combined with 4K cameras.

Functions

Dewarping Mode

The NVR has the ability to correct the distortion in a circular panoramic view produces by a fisheye lens. The NVR offers various dewarping modes for different installations and configurations.

N+M Hot Standby

The highly reliable N+M Hot Standby redundancy design provides a secure, fail-over technique ensuring immediate backup. In the event of a system failure, the slave instantly takes over the master ensuring no data is lost.

Smart Motion Detection+

Smart Motion Detection+, a component of Dahua's Analytics+ technology, improves alarm accuracy and decreases the number of false alarms. The advanced SMD+ algorithm analyzes a scene for human or vehicle motion, while filtering out other motion due to trees, leaves, animals, weather, and triggers an alarm when detected¹.

- Smart H.265+ and Smart H.264+ Video Compression
- · Maximum 320 Mbps Incoming Bandwidth
- Up to 12 MP Resolution for Preview and Playback
- Support for IPC and UPnP Protocols
- 24 PoE Ports
- Customized Live View Layout with Support for Panoramic Displays
- Intelligent Video System with Business Analytics
- Compatible with Dahua Smart Motion Detection+ Cameras
- 3D Intelligent Positioning with Dahua PTZ Cameras













Intelligent Video System (IVS) Recording

With built-in intelligent video analytics, the NVR has the ability to detect and analyze moving objects for improved video surveillance. The NVR provides standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed, People Counting, ideal for business intelligence, and Facial Detection, for searching or identification of individuals.

4K Resolution

4K resolution is a revolutionary breakthrough in image processing technology. 4K delivers four times the resolution of standard HDTV 1080p devices and offers superior picture quality and image details. 4K resolution improves the clarity of a magnified scene to view or record crisp forensic video from large areas.

Face Recognition

The NVR stores face recognition video and data from a dedicated facial recognition camera connected to the NVR. The NVR triggers an event if the recognition database on the camera detects a face match.

Heat Map

The Heat Map option highlights the areas with the highest concentration of people. This information can then be exported into a customized report to assist in business or forensic analysis.

Automatic Network Replenishment Technology (ANR)

Network Video Recorders with the ANR function automatically store video data on an IP camera SD card when the network is disconnected. After recovery of the network, the NVR automatically retrieves the video data stored on the camera.

Automatic License Plate Capture

The NVR automatically captures and stores vehicle license plate images from a dedicated license plate capture camera connected to the NVR. During playback, an operator can perform a license plate search by Time and Date to view thumbnail images of all plates captured during the specified time period. License plate capture technology offers effective entrance/exit management, traffic surveillance, and parking lot monitoring.

Technical Specificatio	n	Network		
System		Ethernet	One (1) RJ-45 Port (10/100/1000 Mbp	
Main Processor	Embedded Quad-core Processor	PoE	24 Ports (IEEE802.3af/at), 10/100 Mbp	
Operating System	Embedded Linux	Forwarding Rate	320 Mbps	
Audio and Video		Torwarding Nate	·	
P Camera Input	24 Channels Input: One (1) Channel, RCA	Network Function	HTTP, HTTPs, TCP/IP, IPv4/IPv6, UPnP, SMTP, NTP, DHCP, DNS, IP Filter, PPPot Alarm Server, IP Search (Support for Dahua IP cameras, DVRs, I	
Two-way Talk	Output: One (1) Channel, RCA			
Display		Maximum User Access	128 Users	
Interface	One (1) HDMI Port (4K) One (1) VGA Port (1080p)	Mobile Operating System	IOS, Android	
Spot Output	HDMI or VGA, configurable	Interoperability	ONVIF 2.4, CGI Conformant	
Resolution	3840 x 2160, 1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768	Storage		
Multi-screen Display	1/4/8/9/16/25	Internal HDD	Two (2) SATA III Ports, Up to 10 TB capacity for each HDD	
On-screen Display	Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording	HDD Mode	Single	
Recording		Auxiliary Interface	Auxiliary Interface	
Compression	Smart H.265+, H.265, Smart H.264+, H.264, MJPEG	USB	One (1) USB 3.0 Port, rear panel One (1) USB 2.0 Port, front panel	
Resolution	12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 1.3 MP, 720p, D1, CIF (The recording rate is dependent on the maximum	RS232	One (1) Port for PC Communication ar	
	resolution and frame rate of the connected IP camera.)	Electrical		
Fisheye Dewarping	One (1) Channel of 12 MP	Power Supply	Single, 100 VAC to 240 VAC, 50/60 Hz	
Recording Bit Rate	320 Mbps	Power Consumption	< 16 W, without HDD	
Bit Rate	16 Kbps to 20 Mbps per channel	Total PoE Power	25.5 W single port, 220 W total	
Record Mode	Manual, Schedule (Regular, Motion Detection), Alarm, IVS, Stop	Environmental		
Record Interval	1 to 120 minutes (default: 60 minutes) Pre-record: 1 to 30 s Post record: 10 to 300 s	Operating Conditions	-10° C to +55° C (+14° F to +131° F)	
Post-record: 10 to 300 s Video Detection and Alarm		Storage Conditions	-20° C to +70° C (-4° F to +158° F), 0 to	
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email,	Construction		
Video Detection	FTP, Snapshot, Buzzer and Screen Tips Motion Detection, MD Zones: 396 (22 x 18), Video Loss and Tampering	Dimensions	1U, 440.0 mm x 419.96 mm x 43.65 m (17.30 in. x 16.50 in. x 1.70 in.)	
Alarm Input	Four (4) Channels,	Net Weight	4.50 kg (9.90 lb), without HDD	
	Low Level Effective, Green Terminal Interface Two (2) Channels,	Gross Weight	6.45 kg (14.20 lb)	
Relay Output	NO/NC Programmable, Green Terminal Interface	Installation	Rack-mounted	
Playback and Backup	1/4/0/20	Certifications		
Sync Playback	1/4/9/16 Four (4) Channels at 4K or	Safety	UL 60950-1 CAN/CSA C22 2 No 60960-1	
NVR Video Output	16 Channels at 1080p Time/Date, Alarm, MD and Exact Search (accurate to	Electromagnetic Compatibility	CAN/CSA C22.2 No.60960-1 FCC Part 15 Subpart B	
Search Mode	one second)	(EMC)	ANSI C63.4-2014	
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom			
Backup Mode	USB Device, Network			
Third-party Support				
Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and others			

Camera Support

Thermal Cameras	16 Channels		
Analytics+ Cameras			
Face Recognition	Four (4) Channels		
Perimeter Protection	16 Channels		
Metadata	16 Channels		
Smart Motion Detection+	Any channel connected to a Dahua Network camera with Smart Motion Detection+		

Intelligence


Heat Map

intelligence					
IVS triggers an alarm and takes a defined action for the following events:					
 Tampering with the camera. Camera loses or changes focus drastically. Error writing to an onboard Micro SD card. Error sending or receiving data over the network. Unauthorized access to the camera. 					
Premium Features					
An object moves through any part of the scene.					
crosses a user-defined line.					
enters or exits a defined perimeter.					
A person or object moves the camera to change the scene or covers the camera to obscure the scene.					
leaves an object in designated area, or a target an object from the same designated area.					
Advanced Features					
Detects and captures a snapshot of a human face in a defined area within a scene.					
Triggers an event if the connected facial recognition camera matches a face to one stored on the camera's database.					
ļ.					


Ordering Information Туре Part Number Description 24-channel 1U 24 PoE Ports 4K H.265 N52A4P3 Network Video Recorder, 3 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P4 Network Video Recorder, 4 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P6 Network Video Recorder, 6 TB NVR 24-channel 1U 24 PoE Ports 4K H.265 N52A4P8 Network Video Recorder, 8 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P10 Network Video Recorder, 10 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P12 Network Video Recorder, 12 TB Rack Mount Tray, compatible with 1U, Mini 1U, Accessory, and Compact 1U Storage Devices PFH101 Optional 482.60 mm x 281.20 mm x 43.70 mm (19.0 in. x 11.07 in. x 1.72 in.)

Generates a visual representation of data.

Dimensions (mm/in.)

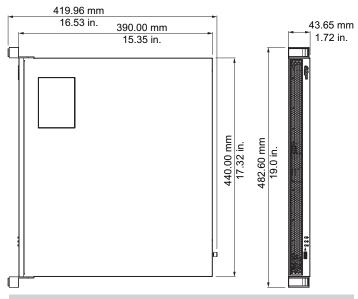

Rear Panel



1	Power Input	6	VGA Output
2	On/Off Button	7	HDMI Output
3	PoE Ports (x24)	8	RS232 Port
4	Alarm Input/Output	9	USB 3.0 Port
5	Ethernet Port (1000 Mbps)	10	Audio Input/Output

The recorder SMD+ functions are available only when connected to a Dahua network camera with SMD+ functionality. Pair a Smart Motion Detection+ camera with a Dahua recording device that also offers SMD+ functionality to take advantage of SMD+ alarm filtering and object classification when searching and playing back recorded video.

